

Aqua-Pure®

Models:

AP110 Series / AP124 Series

Whole House Water Filters

Spec # _____

Quantity _____

Applications:

- Pre-Filtration
- Sediment/Rust

At a Glance:

- New and Improved*
- Up to 30% Longer Lasting*
- 47% More Surface Area*
- 50% More Efficient*



AP110 / AP124

AP110-2

Product Benefits:

- Patent pending technology provides fine sediment filtration down to 5 micron**
- Grooved cartridge increases surface area for longer cartridge life, by 132% over non-grooved and 47% over the previous design
- Rigid construction helps to eliminate sediment “unloading” due to variances in water pressure


* as compared to original AP110 design

** depends on model selected

Product Specifications:

Model No. (Part No.)	Dimensions		Flow Rate	Max. Water Temp.	Degree of Filtration
	Height	Diameter			
AP110 (56204-04) (56204-06)	9-3/4" (24.8 cm)	2-1/2" (6.4 cm)	8 gpm (30.3 lpm)	170°F (76.7°C)	5 micron nominal
AP110-2 (56204-05)	19-1/2" (49.5 cm)	2-1/2" (6.4 cm)	16 gpm (60.6 lpm)	170°F (76.7°C)	5 micron nominal
AP124 (56206-01) (56206-05)	9-3/4" (24.8 cm)	2-1/2" (6.4 cm)	8 gpm (30.3 lpm)	170°F (76.7°C)	50 micron nominal

Aqua-Pure®

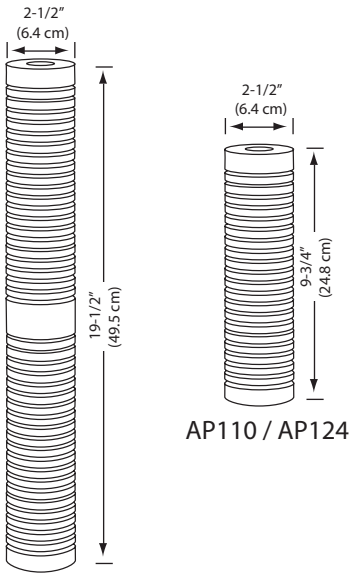


AP110-2

AP110 / AP124

Easy Installation:

CAUTION: Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

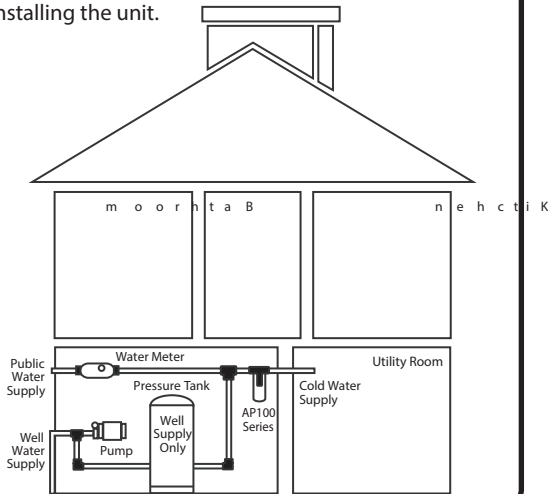

Spec # _____

Quantity _____

Model Number _____

Part Number _____

Physical Specifications:

- Cartridge is manufactured from FDA CFR-21 compliant materials
- Cartridge has a maximum operating temperature of 170°F (76.7°C)
- Cartridge to be installed at point of entry

Fits all CUNO and most competitive filter housings		
AP110	AP110-2	AP124
AP11T	AP12T	AP11T
AP101T	AP102T	AP101T
AP1610SS	AP2610SS	AP1610SS
SST1HA	SST2HB	SST1HA
SS4 EPE-316L (4 carts)		SS4 EPE-316L (4 carts)
SS8 EPE-316L (8 carts - 2 high)		SS8 EPE-316L (8 carts - 2 high)
SS12 EPE-316L (12 carts - 3 high)		SS12 EPE-316L (12 carts - 3 high)
SS20 EPE-316L (20 carts - 4 high)		SS20 EPE-316L (20 carts - 4 high)
SS24 EPE-316L (24 carts - 2 high)		SS24 EPE-316L (24 carts - 2 high)
SS36 EPE-316L (36 carts - 3 high)		SS36 EPE-316L (36 carts - 3 high)

WARNING: Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. Change the filter cartridge at least every 6 months. Improper installation and maintenance may result in property damage due to water leakage.

Limited Warranty:

CUNO Incorporated warrants this Product to be free from defects in material and workmanship for one (1) year from the date of purchase. This warranty does not cover failures resulting from abuse, misuse, alteration or damage not caused by CUNO or failure to follow installation instructions. If the Product is defective CUNO will replace the Product or refund your Product purchase price. CUNO will not be liable for any indirect, special, incidental, or consequential damages arising from the use of this Product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. To obtain warranty service, mail your request to Warranty Claims, CUNO Incorporated, 400 Research Parkway, Meriden, CT 06450. Proof of purchase (original sales receipt) must accompany the warranty claim, along with a complete description of the Product, model number and alleged defect. This warranty gives you specific legal rights and you may have other rights which vary from state to state, or country to country.

Distributed by:



Filter-Online
Nordic Filtration Solution

Sunekær 1 • 5471 Sønderød • Denmark
Tlf.: +45 70 40 42 22
mail: info@filter-online.com
web: www.filter-online.com



Visit www.nsf.org for the claims associated with products that are NSF listed.



CUNO and Aqua-Pure are trademarks of 3M Company used under license. NSF is a trademark of NSF International. © 2008 3M Company. All rights reserved. LITAP929 1107