




## PBH Bag Filterhousing




### Specifications

Size, "(inch):	10", 20"
Filtration rating, µm:	x
Flowrate, l/min:	50/100
Max. Temp. C°:	40
Max. Pressure:	6,9/6,2
Efficiency, %:	x
Connection:	see table
Material:	Polypropylene
O-ring:	EPDM
Approval(s):	EC1935/2004, FDA

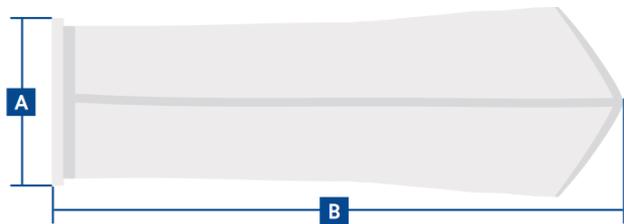

The Compact, economic and versatile, with all the benefits of traditional bag filtration technology. The complete polypropylene construction of the housing is perfectly suited for applications where cost is restricted and each vessel comes complete with a pressure gauge, spanner and drain valve.

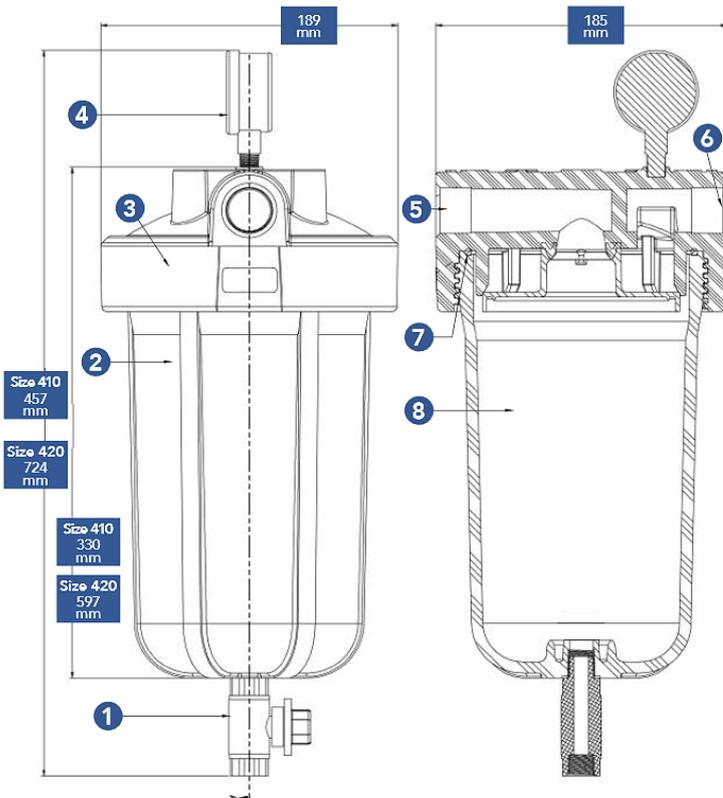

Bag Dimensions			
Bag Size	A (mm)	B (mm)	Area (m <sup>2</sup> )
410	116	203	0,07
420	116	457	0,16

Specifications			
Model:	Housing Size	Port Size	Flow (lpm):
410-1	10"BB	1 NPT	50
410-1.5	10"BB	1½ BSP	50
420-1	20"BB	1 NPT	100
420-1,5	20"BB	1½ BSP	100

No.	Name	Material
1	Ball Valve	PVC/Buna-N seals
2	Body	Polypropylene
3	Lid	Polypropylene (HFPP)
4	Pressure Gauge	Bismuth Brass (Lead free)
5	Inlet	Polypropylene
6	Outlet	Polypropylene
7	O-ring	EPDM
8	Basket	Polypropylene

