

# Water Softener

## Smartflow 125/ 250 / Pro version



### TECHNICAL DATA

#### Common Data

- Bypass 3/4"
- 2 Connection pipes 1m, 3/4"
- Overfloat protection
- Digital Display
- Operating Temp.: 3°C - 40°C
- Power req.: 230v/12v
- Low Salt Alarm
- Soft Close Cover
- Max. Pressure: 10bar
- Touchscreen (Pro version)
- Salt measurement by laser (Pro version)
- Vacation mode (Pro version)

#### Smartflow 125 / Pro

- 29 x 48 x 67 cm (WxDxH)
- 11L Resin
- Salt Capacity: 35kg (Crystal Salt)
- Fits Household with 1-5 people
- Weight: 25kg

#### Smartflow 250 / Pro

- 29 x 48 x 113 cm (WxDxH)
- 22L Resin
- Salt Capacity: 75kg (Crystal Salt)
- Fits Household with 6-8 people
- Weight: 40kg

### Flow Controlled Regeneration

Our water softener are designed to ensure the reliability of soft water in households, with low salt alarm. The flow controlled regeneration ensures water usage only when necessary - lowering water usage and expenses.


The PRO version builds on the popular Smartflow 125 and is upgraded with intuitive features

**Type Approval:**  
Drikkevandsgodkent  
T C 900037

### Lots of savings

A softener is often called "the self-paying device".

You will find that your savings on soaps, detergents, cleaning aids and personal care products help your family's household budget. And if you put a price on your time, you will be most satisfied with the time your new family servant saves.

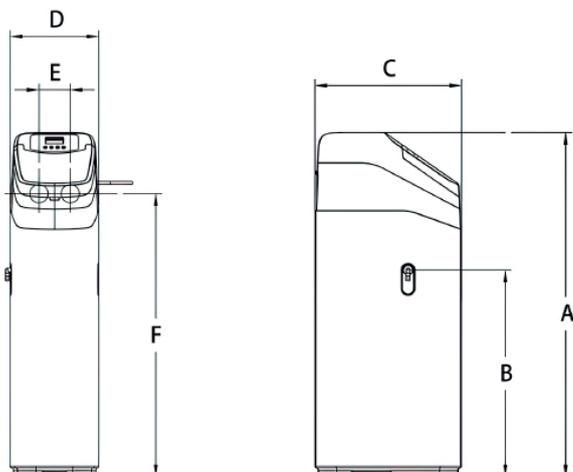

| Dimension (mm) | Smartflow 125 | Smartflow 250 |
|----------------|---------------|---------------|
| A              | 675 (±3)      | 1134 (±3)     |
| B              | 350 (±2)      | 680 (±2)      |
| C              | 480 (±2)      | 480 (±2)      |
| D              | 290 (±2)      | 290 (±2)      |
| E              | 50,8 (±0,5)   | 50,8 (±0,5)   |
| F              | 471 (±3)      | 931 (±3)      |